

Pipings & devices Specifications

Item No	Description	Quantity
2.1	PVC 1" HI SCH 40	
2.2	PVC 2" HI SCH 40	
2.3	PVC 3" HI SCH 40	
2.4	PVC 1"1/4 HI SCH 40	
2.5	EMT 1"	
2.6	EMT 2"	
2.7	EMT 3"	
2.8	EMT 1"1/4	
2.9	Safety Switch 200 amps	
2.10	Safety Switch 400 amps	
2.11	Safety switch 600 Amps/ 3 poles (fusibles 600 Amps inclus)	
2.12	Double Throw Switch 600 Amps	
2.13	Switchboard 800 Amps/ 3 poles	
2.14	Load center 12 spaces 125 AMPS, 120/208Y	
2.15	Load center 20 spaces 125 AMPS, 120/208Y	
2.16	#2 Bare Copper Wire	
2.17	PLUGS and SCREWS	

General requirements for :

□

Item 2.1 PVC 1" HI SCH 40

	Yes/No	Bidder Remarks/Notes
Operational characteristics PVC Pipe Sch40 1" White / Grey Custom Length : 10 feet		


The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.2 PVC 2" HI SCH40

	Yes/No	Bidder Remarks/Notes
Operational characteristics PVC Pipe Sch40 2" White / Grey Custom Length : 10 feet		


The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:

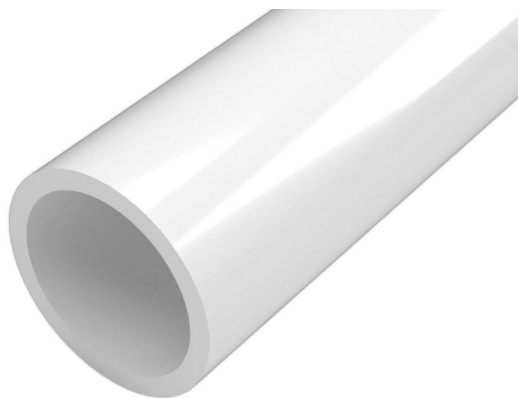

Item 2.3 SCH40 PIPE 3"

	Yes/No	Bidder Remarks/Notes
Operational characteristics PVC Pipe Sch40 3" White / Grey Custom Length : 10 feet		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:

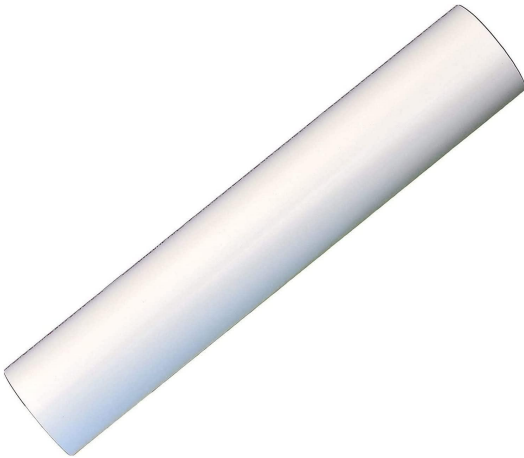

Item 2.4 PVC 1"1/4 HI SCH 40

	Yes/No	Bidder Remarks/Notes
Operational characteristics PVC Pipe Sch40 1"1/4 White / Grey Custom Length : 10 feet		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.5 EMT 1''

	Yes/No	Bidder Remarks/Notes
Operational characteristics Electrical Metallic Conduit (EMT) galvanized, 1 Inch Diameter Length:10 feet		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.6 EMT 2"

	Yes/No	Bidder Remarks/Notes
Operational characteristics Electrical Metallic Conduit (EMT) galvanized, 2 Inch Diameter Length:10 feet		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.7. EMT 3"

	Yes/No	Bidder Remarks/Notes
Operational characteristics Electrical Metallic Conduit (EMT) galvanized, 3 Inch Diameter Length:10 feet		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.8 EMT 1"1/4

	Yes/No	Bidder Remarks/Notes
Operational characteristics Electrical Metallic Conduit (EMT) galvanized, 1"1/4 Diameter Length:10 feet		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.9 Safety Switch 200 amps

	Yes/No	Bidder Remarks/Notes
Operational characteristics 200 Amp 240-Volt 3-Pole (with fuses INCLUDED) General Duty Safety Switch Reference brand (recommended): General Electric / Square D/ Schneider Electric		


The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.10 Safety Switch 400 Amps

	Yes/No	Bidder Remarks/Notes
Operational characteristics 400 Amp NEMA 3R (with fuses INCLUDED) Outdoor Safety Switch Reference brand (recommended): General Electric / Square D/ Schneider Electric		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:

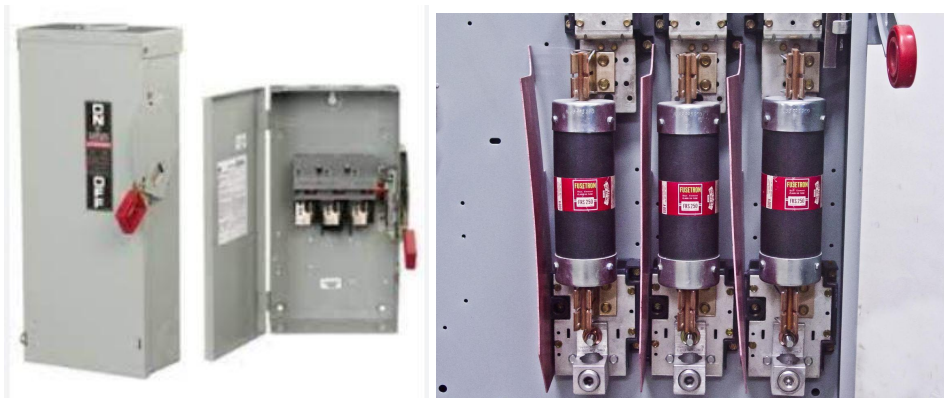

Item 2.11 Safety switch 600 Amps/ 3 poles (fusibles 600 Amps included)

	Yes/No	Bidder Remarks/Notes
Operational characteristics Safety Switch: 600 A Amps AC, 200 HP @ 240V AC, 3R, 3 Poles, 3 Wires (with fuses INCLUDED) Reference brand (recommended): General Electric / Square D/ Schneider Electric		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.12 Double Throw switch 600 Amps

	Yes/No	Bidder Remarks/Notes
Operational characteristics Safety Switch, Double Throw, 3-Pole, 3 Wire, 600 Amp, Heavy Duty, Non-Fusible Without Neutral, 600 Volt AC, NEMA 1 Reference brand (recommended): General Electric / Square D / Schneider Electric		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.13 Switchboard 800 amps

	Yes/No	Bidder Remarks/Notes
Operational characteristics switchboard 800 amps 3 Phase, 3 Wire, 600 VAC, 800 Amp, outdoor use Panel Board breakers INCLUDED Incomer isolator switch included 10 breakers 600 Volt 800 Amp Molded Case Circuit Breaker Reference brand (recommended) : General Electric / Square D/ Schneider Electric		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.14 Load center 12 spaces 125 AMPS, 120/208

	Yes/No	Bidder Remarks/Notes
<p>Operational characteristics</p> <p>Load Center, 125-Amp Convertible Main Lugs, 1-Phase, 12-Space 24-Circuit, Indoor, breakers INCLUDED Plug-on Neutral Ready</p> <p>Incomer isolator switch included</p> <p>4 breakers 15 amps : éclairage 6 breakers 20 amps : prises 2 breakers 30 amps : AC / spare</p> <p>Reference brand (recommended): General Electric / Square D / Schneider Electric</p>		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.15 Load center 12 spaces 125 AMPS, 120/208Y

	Yes/No	Bidder Remarks/Notes
Operational characteristics Load Center, 20 Spaces, 125 A Amps, 208Y/120/240V AC, QO Circuit Breaker Type outdoor breakers INCLUDED 6 breakers 15 amps : éclairage 10 breakers 20 amps : prises 4 breakers 30 amps : AC / spare Incomer isolator switch included Reference brand (recommended) : General Electric / Square D/ Schneider Electric		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.16 #2 Bare Copper Wire

	Yes/No	Bidder Remarks/Notes
Operational characteristics # 2 Gauge Stranded SD Bare Copper Grounding Wire 500 feet		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:



Item 2.17 PLUGS and SCREWS

	Yes/No	Bidder Remarks/Notes
Operational characteristics <ul style="list-style-type: none">• 5/16" x 2" Plastic Conical Wall Anchor• 5/16"X 2" PHILLIPS TRUSS HEAD SHEET METAL SCREW		

The images below are intended solely as a guiding support and should be considered as purely indicative and not restrictive of the expected item characteristics:

